

# UNCLASSIFIED

AD NUMBER	
AD037812	
CLASSIFICATION CHANGES	
TO:	unclassified
FROM:	confidential
LIMITATION CHANGES	
TO: Approved for public release; distribution is unlimited.	
FROM: Distribution authorized to DoD only; Administrative/Operational Use; OCT 1953. Other requests shall be referred to Navy Bureau of Ships, Navy Yard, Washington, DC.	
AUTHORITY	
30 nov 1965, DoDD 5200.10; cfsti per navy, 1 apr 1968	

THIS PAGE IS UNCLASSIFIED

# Armed Services Technical Information Agency

Because of our limited supply, you are requested to return this copy WHEN IT HAS SERVED YOUR PURPOSE so that it may be made available to other requesters. Your cooperation will be appreciated.

**AD 37812**

**NOTICE: WHEN GOVERNMENT OR OTHER DRAWINGS, SPECIFICATIONS OR OTHER DATA ARE USED FOR ANY PURPOSE OTHER THAN IN CONNECTION WITH A DEFINITELY RELATED GOVERNMENT PROCUREMENT OPERATION, THE U. S. GOVERNMENT THEREBY INCURS NO RESPONSIBILITY, NOR ANY OBLIGATION WHATSOEVER; AND THE FACT THAT THE GOVERNMENT MAY HAVE FORMULATED, FURNISHED, OR IN ANY WAY SUPPLIED THE SAID DRAWINGS, SPECIFICATIONS, OR OTHER DATA IS NOT TO BE REGARDED BY IMPLICATION OR OTHERWISE AS IN ANY MANNER LICENSING THE HOLDER OR ANY OTHER PERSON OR CORPORATION, OR CONVEYING ANY RIGHTS OR PERMISSION TO MANUFACTURE, USE OR SELL ANY PATENTED INVENTION THAT MAY IN ANY WAY BE RELATED THERETO.**

**Reproduced by  
DOCUMENT SERVICE CENTER  
KNOTT BUILDING, DAYTON, 2, OHIO**

**CONFIDENTIAL**

**NOTICE: THIS DOCUMENT CONTAINS INFORMATION AFFECTING THE  
NATIONAL DEFENSE OF THE UNITED STATES WITHIN THE MEANING  
OF THE ESPIONAGE LAWS, TITLE 18, U.S.C., SECTIONS 793 and 794.  
THE TRANSMISSION OR THE REVELATION OF ITS CONTENTS IN  
ANY MANNER TO AN UNAUTHORIZED PERSON IS PROHIBITED BY LAW.**

CONFIDENTIAL

SECURITY INFORMATION

AD No. 37812

ASTIA FILE COPY

VARIAN ASSOCIATES  
ENGINEERING REPORT

COPY NO. 21

FURTHER DISSEMINATION IS AUTHORIZED ONLY TO  
MILITARY AGENCIES.

PROGRESS REPORT

DESIGN AND DEVELOPMENT OF KLYSTRON

OSCILLATORS V-39 AND V-40

For Period: 1 October to 31 October 1953

Prepared for

Bureau of Ships

Navy Department

on


BUSHIPS CONTRACT NObsr-52105

Index No. NE 110244

Prepared by:

Robert G. Rockwell

Approved by:

  
H. Myrl Stearns  
Vice-Pres. and Gen. Manager

NOTICE:

This document contains information affecting the national defense of the United States within the meaning of the Espionage Laws, Title 18 U. S. C., Sections 793, 794, 795. Its transmission or the revelation of its contents in any manner to an unauthorized person is prohibited by law.

  
Sigurd F. Varian  
Vice-Pres. for Engineering

NOVEMBER 1953

Page 1 of 7

CONFIDENTIAL

SECURITY INFORMATION

8110730-54

**CONFIDENTIAL**  
SECURITY INFORMATION

PURPOSE

The purpose of the program engaged under BuShips Contract No. NObsr-52105 is to design and develop two wide-range klystron oscillators, V-39 and V-40, which will comply with the specifications outlined in this contract.

The two oscillators will cover the frequency band from 10 to 21 kmc. One tube will tune over the lower half of the band from 10 to 15.5 kmc, and the other will cover the band from 15 to 21 kmc. Preliminary design tubes of each type, complete with electrical test and characteristic data, will be furnished. In addition, five tubes embodying the final design of each type will be supplied, along with electrical characteristics and test data, final proposed specifications, and manufacturing drawings.

# CONFIDENTIAL

SECURITY INFORMATION

## PROGRESS

During the past month one V-40 tube (tube No. 54) was tested and passed contract specifications. In addition, four V-39 tubes (tubes No. 14, 18, 20, and 21) were tested and performed satisfactorily except for low power output at about 10 kmc. The performance data for the V-40 tube are given in Table I. Table II shows typical data for the V-39, as exemplified by V-39 tube No. 20. Figures 1 and 2 are tuning curves for V-40 tube No. 54 and V-39 tube No. 20, respectively. Measurements of all five tubes tested this month were witnessed by the local Inspector of Naval Material.

TABLE I

Performance Data of V-40 Tube No. 54

Heater Voltage = 6.3 v

Heater Current = 1.2 a

Frequency (kmc)	Beam Voltage (vdc)	Beam Current (madc)	Reflector Voltage (vdc)	Power Output		Tuning Resetability (%)
				Matched Load (mw)	Optimum Load (mw)	
21.0	750	32	-300	71	115	0.020
20.5	750	35	-285	94	144	0.020
20.0	750	36	-260	83	167	0.008
20.0	750	35	-530	91	111	0.020
19.0	750	34	-460	120	157	0.008
18.0	750	35	-400	137	181	0.020
17.0 <sup>1</sup>	750	36	-340	132	255	0.040
17.0 <sup>2</sup>	750	36	-340	105	170	0.040
16.0	750	36	-270	116	240	0.010
15.0	750	36	-240	111	200	0.010

- 
- 1 K-Band Waveguide
  - 2 K<sub>u</sub>-Band Waveguide

CONFIDENTIAL

SECURITY INFORMATION

# CONFIDENTIAL

SECURITY INFORMATION

TABLE II

Performance Data of V-39 Tube No. 20

Heater Voltage = 6.3 v

Heater Current = 1.2 a

Frequency (kmc)	Beam Voltage (vdc)	Beam Current (madc)	Reflector Voltage (vdc)	Power Output		Tuning Resetability (%)
				Matched Load (mw)	Optimum Load (mw)	
15.5	750	33	-315	58.5	155	0.006
15.0	750	33	-300	176	210	0.030
14.0	750	32	-250	109	128	0.000
14.0	750	35	-450	292	292	0.000
13.0	750	35	-380	187	243	0.020
12.0	750	35	-300	160	239	0.005
11.0	750	35	-240	76	181	0.005
10.0	750	31	-170	25	110	0.000

An improved technique was used to measure the noise. This consisted essentially of utilizing a Pound Microwave Discriminator, and resulted in a much greater sensitivity than obtained heretofore. It was found that the V-39 FM beam noise, measured with battery voltages applied to all electrodes of the tube, was of the order of 3 kc; the measured noise was approximately doubled when a-c was applied to the heater of the tube.

The modulation sensitivity of the V-39 tubes, measured at 12 kmc, was approximately 0.18 mc/volt.

Two of the V-39 tubes required shorting screws to the tube body since the ring spacing was at the extreme limits of tolerance.

# CONFIDENTIAL

SECURITY INFORMATION

# CONFIDENTIAL

SECURITY INFORMATION

## PROGRAM FOR NEXT INTERVAL

A change in design of the V-40 tube will be made which will reduce the amount of pretuning required. Pretuning, with the present design, has resulted in a bowed header, causing special, undesired trimming of the mica windows. Another change will eliminate the need for shorting screws to the tube body, and will relax the close tolerances needed for the ring spacing.

After successful operation of this new V-40, a V-39 will be designed by scaling from the V-40 in an attempt to: (1) reduce the number of mode suppressors, (2) bring the suppressor alongside the main cavity, and (3) increase the power at the 10 kmc end of the tuning range.

Estimated expenditures during October 1953: \$3,012.00

Estimated man-hours during October 1953: 360

Page 5 of 7


# CONFIDENTIAL

SECURITY INFORMATION



CONFIDENTIAL

SECURITY INFORMATION

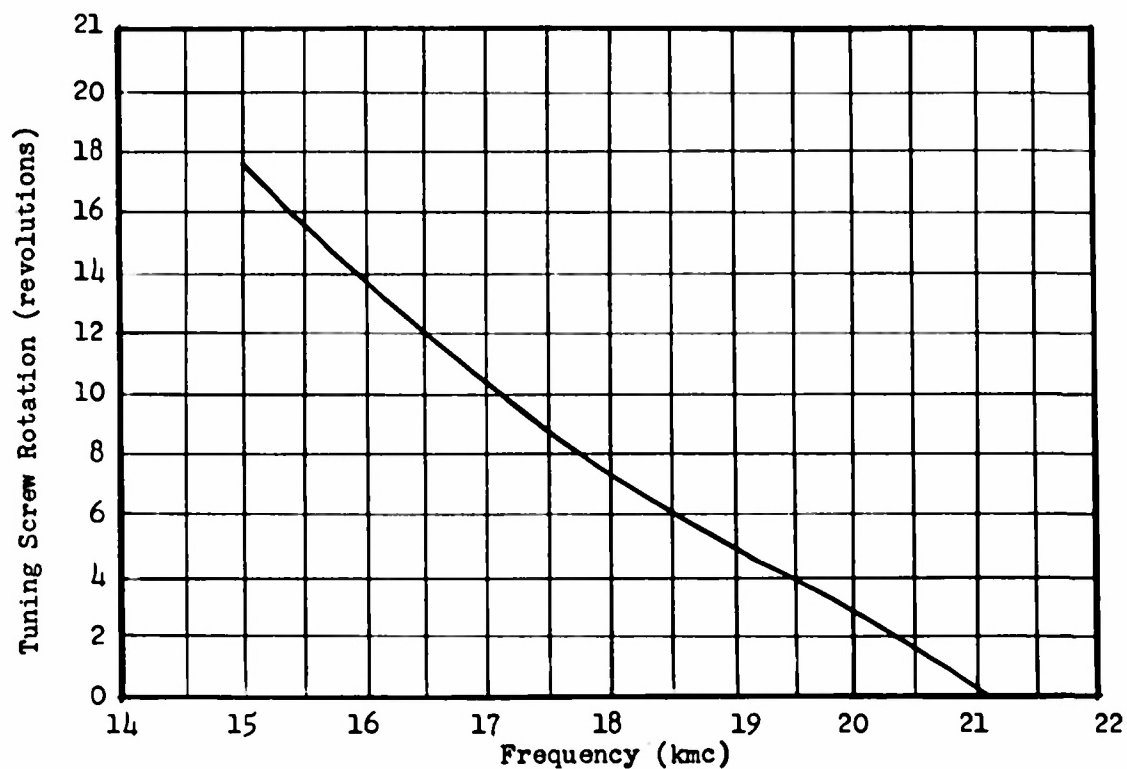

Reflector Mod. Sens. = 0.19 mc/volt @ 17 kmc  
FM Noise (battery voltage on tube)  $\approx$  2 kc  
FM Noise (a-c voltage on heater) = 30 kc

FIGURE 1

TUNING CURVE FOR V-40 TUBE NO. 54


Page 6 of 7

CONFIDENTIAL

SECURITY INFORMATION

CONFIDENTIAL

SECURITY INFORMATION

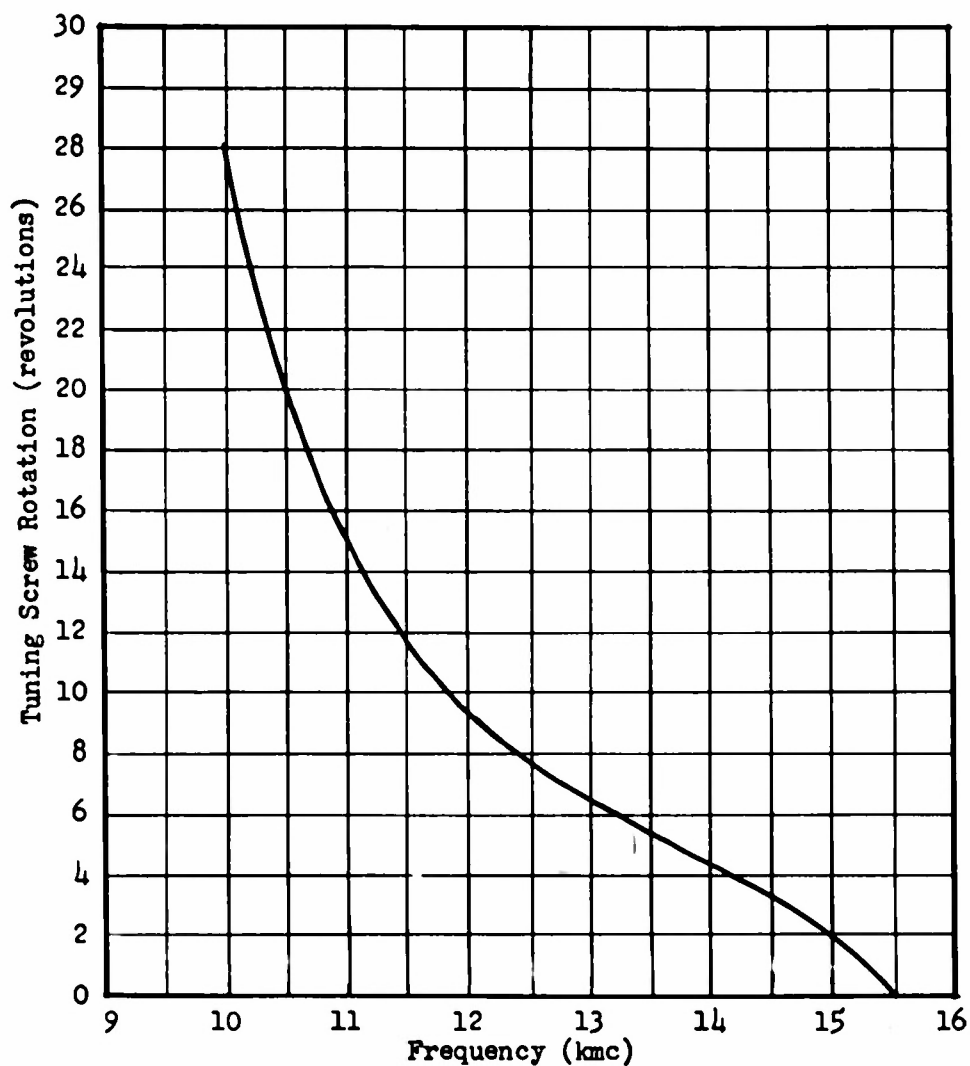

Reflector Mod. Sens. = 0.17 mc/volt @ 12 kmc  
FM Noise (battery voltage on tube) < 1 kc  
FM Noise (a-c voltage on heater) < 2 kc

FIGURE 2

TUNING CURVE FOR V-39 TUBE NO. 20

Page 7 of 7

CONFIDENTIAL

SECURITY INFORMATION

# Armed Services Technical Information Agency

Because of our limited supply, you are requested to return this copy WHEN IT HAS SERVED YOUR PURPOSE so that it may be made available to other requesters. Your cooperation will be appreciated.

**AD 37812**

**NOTICE: WHEN GOVERNMENT OR OTHER DRAWINGS, SPECIFICATIONS OR OTHER DATA ARE USED FOR ANY PURPOSE OTHER THAN IN CONNECTION WITH A DEFINITELY RELATED GOVERNMENT PROCUREMENT OPERATION, THE U. S. GOVERNMENT THEREBY INCURS NO RESPONSIBILITY, NOR ANY OBLIGATION WHATSOEVER; AND THE FACT THAT THE GOVERNMENT MAY HAVE FORMULATED, FURNISHED, OR IN ANY WAY SUPPLIED THE SAID DRAWINGS, SPECIFICATIONS, OR OTHER DATA IS NOT TO BE REGARDED BY IMPLICATION OR OTHERWISE AS IN ANY MANNER LICENSING THE HOLDER OR ANY OTHER PERSON OR CORPORATION, OR CONVEYING ANY RIGHTS OR PERMISSION TO MANUFACTURE, USE OR SELL ANY PATENTED INVENTION THAT MAY IN ANY WAY BE RELATED THERETO.**

**Reproduced by  
DOCUMENT SERVICE CENTER  
KNOTT BUILDING, DAYTON, 2, OHIO**

**CONFIDENTIAL**